

QUALITY CHANGES THE WORLD

**PRODUCT  
SPECIFICATIONS**



# STC250T4

**SANY TRUCK CRANE  
25 TON LIFTING CAPACITY**



**Max. Lifting Capacity: 25 t**  
**Max. Boom Length: 35 m**  
**Max. Lifting Moment: 1078 kN-m**

[www.sanyglobal.com](http://www.sanyglobal.com)



# SANY TRUCK CRANE STC250T4 / 25 TON LIFTING CAPACITY

## Strong boom

- 35m telescopic boom, Reach a new height of 35.5m.
- Larger cross-section boom, achieving a load moment of 1078KN·m.
- Boom section overlap increased, resulting in higher torsion resistance and bending resistance.
- 8m lattice jib, triangular structure for stable operation.



## Powerful chassis

- DF Cummins ISLe290 30 engine, FAST 9-speed synchronizing gearbox, rubber suspension, 12R22.5 wire tire.
- Frame torsion resistance verified by 20k times of reliability and safety cycling test.
- Outrigger span expanded to 5.18m×6.4m (largest among this tonnage in the industry), stable base.
- Low deck carrier for drive stability.





**SANY TRUCK CRANE**  
**STC250T4 / 25 TON LIFTING CAPACITY**



**Precise hydraulics**


- Load sensing hydraulic system: higher efficiency with less consumption.
- Constant-pressure powered luffing: smoothly luffing down, free from impact of load fluctuation.
- Big-flow piston slewing motor: slower slewing with larger torque.
- Power control: Engine speed reduced by 12% in operation, less fuel needed, less noise generated.




Mass-flow main valve




Bivariate piston pump




Luffing balance valve



Slewing proportional valve



Winch motor



Winch balance valve



Length & angle indicator



7" color display



Height limit switch



*Danfoss*  
Pressure sensor



Winch protector



Smart I/O power distribution



**Smart control**

- CAN-BUS system: instant transfer of information, as fast as 20ms.
- Fault diagnosis: BCM controller for fault detection and easy maintenance.
- 7" color display & smart panel & IO power distribution: user friendly.
- Safety guarantee: SANY, Load Moment Indicator monitoring load and wire rope conditions.



# Technical Features




25 ton hook block



5 ton hook block


## Winch for easy loading

- Max. single line pull up to 5 ton. Freight within 5t can be loaded with a 5t auxiliary hook (standard configuration).
- Auxiliary hook block: wide opening with latch, safe and convenient.

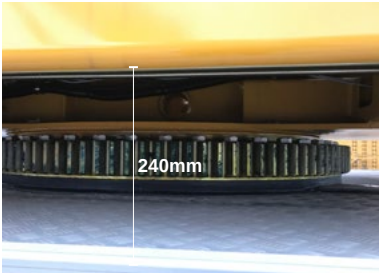

## Walking deck

- Abundant distance between deck and slewing platform to place outrigger sleeper.
- Ample space on deck tail to place sleepers.

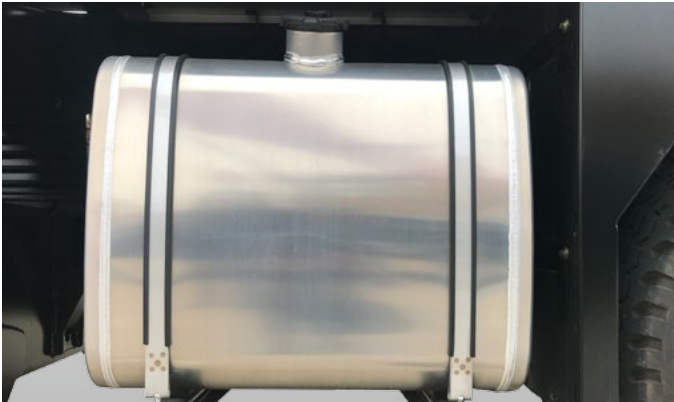

## Power and travel

- 300L fuel reservoir, 882km possible after every refuel.



## Heat radiator

- Oil radiator mounted on the right of slewing platform, clear airflow and radiating.

# Technical Features



## Two cabs


- Ergonomic design gives you comfortable drive and operation.
- Wide view and multiple indicators for safe performance.



## Counterweight

- Fixed 5 ton counterweight, high density with smaller size.

Overall Dimensions

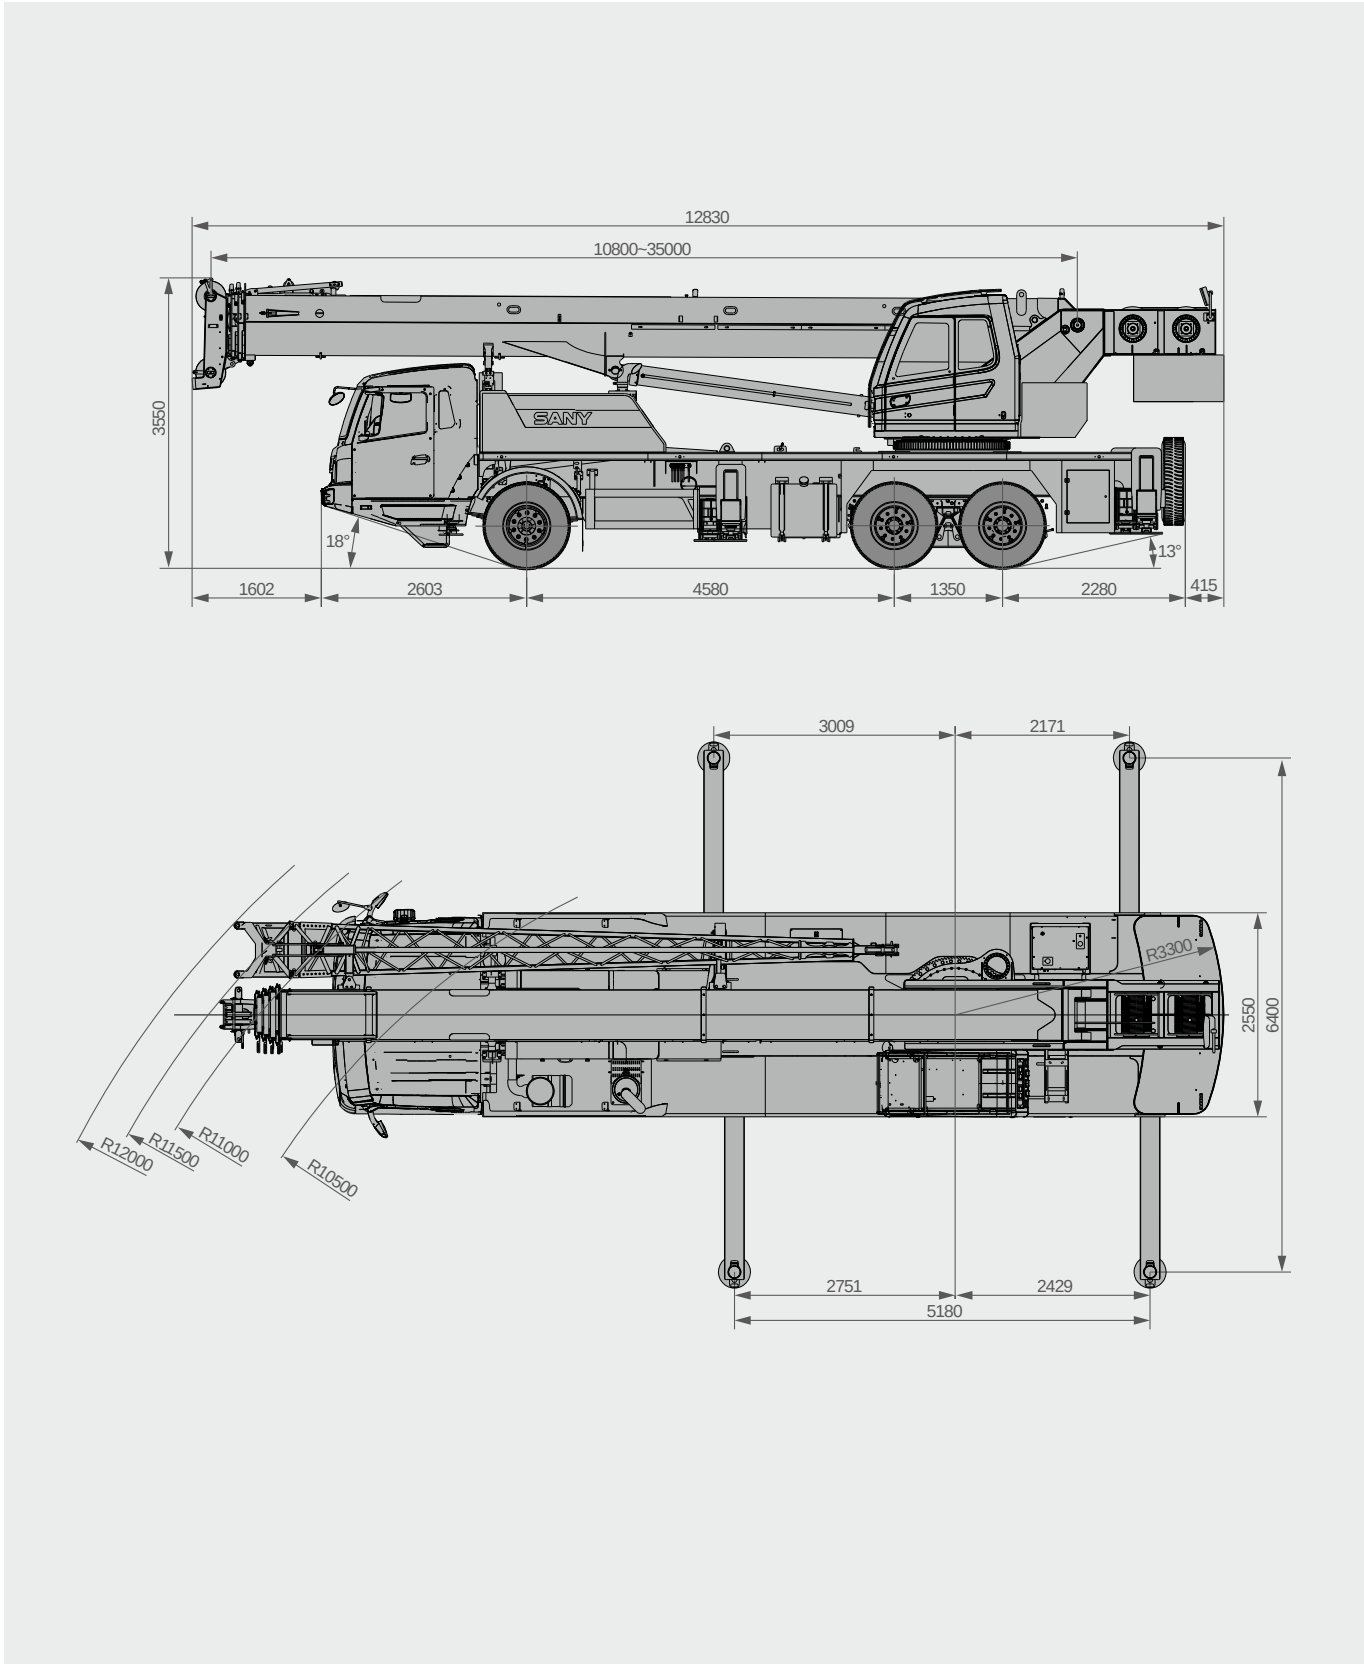

Technical Specification

CATEGORY	ITEM		UNIT	VALUE
CAPACITY	Max. lifting capacity		t	25
WEIGHT	Gross weight		kg	30600
POWER	Engine model			ISLe290 30
	Max. engine power		kW/rpm	213/2100
	Max. engine torque		N·m/rpm	1050/(1200-1400)
DIMENSIONS	Overall length		mm	12830
	Overall width		mm	2550
	Overall height		mm	3550
	Axle base	Axle 1&2	mm	4580
		Axle 2&3	mm	1350
TRAVEL	Max.travel speed		km/h	85
	Steering radius	Min.steering radius	m	10.5
		Min.steering radius of boom tip	m	12.5
	Min.ground clearance		mm	250
	Approach angle		°	18
	Departure angle		°	13
	Max.gradeability		%	40
	Fuel consumption per 100km		L	35
	MAIN PERFORMANCE	Working temperature range		°C
Min.rated lifting radius		m	3	
Tail slewing radius		m	3.3	
Boom sections (Qty.)			4	
Boom shape			U-shape	
Max.lifting moment		Basic boom	kN·m	1078
		Full-extend boom	kN·m	658
		Full-extend boom+jib	kN·m	356
Boom length		Basic boom	m	10.8
		Full-extend boom	m	35
		Full-extend boom+jib	m	43
Outrigger span (Longitudinal×Transverse)		m	6.4×5.18	
Jib offset		°	0,15,30	
OPERATION SPEED		Max.single rope lifting speed of main winch (empty load)		m/min
	Max.single rope lifting speed of auxiliary winch (empty load)		m/min	130
	Full extension / Retraction time of boom		s	55/45
	Full luffing up / Down time of boom		s	45/55
	Slewing speed		r/min	2.5
AIRCONDITIONER	In operator's cab			Heating & Cooling
	In driver's cab			Heating & Cooling

Technical Parameters



Axle Load

Axle	1	2	3	Gross weight
Load per axle /kg	6800	12000	11800	30600



Hook


Load/t	Number of sheaves	Rope rate	Hook weight /kg
25	4	8	320
5	-	-	85



Operations

Item		Rope diameter/length	Max. single line pull
Main winch		16mm/165m	5t
Auxiliary winch		16mm/95m	5t
Slewing		2.5r/min	
Luffing up/down		45s/55s	
Telescoping		55s/45s	
Outrigger jack	Retract	30s	
	Extend	15s	
Outrigger beam	Retract	25s	
	Extend	20s	

Operating Range

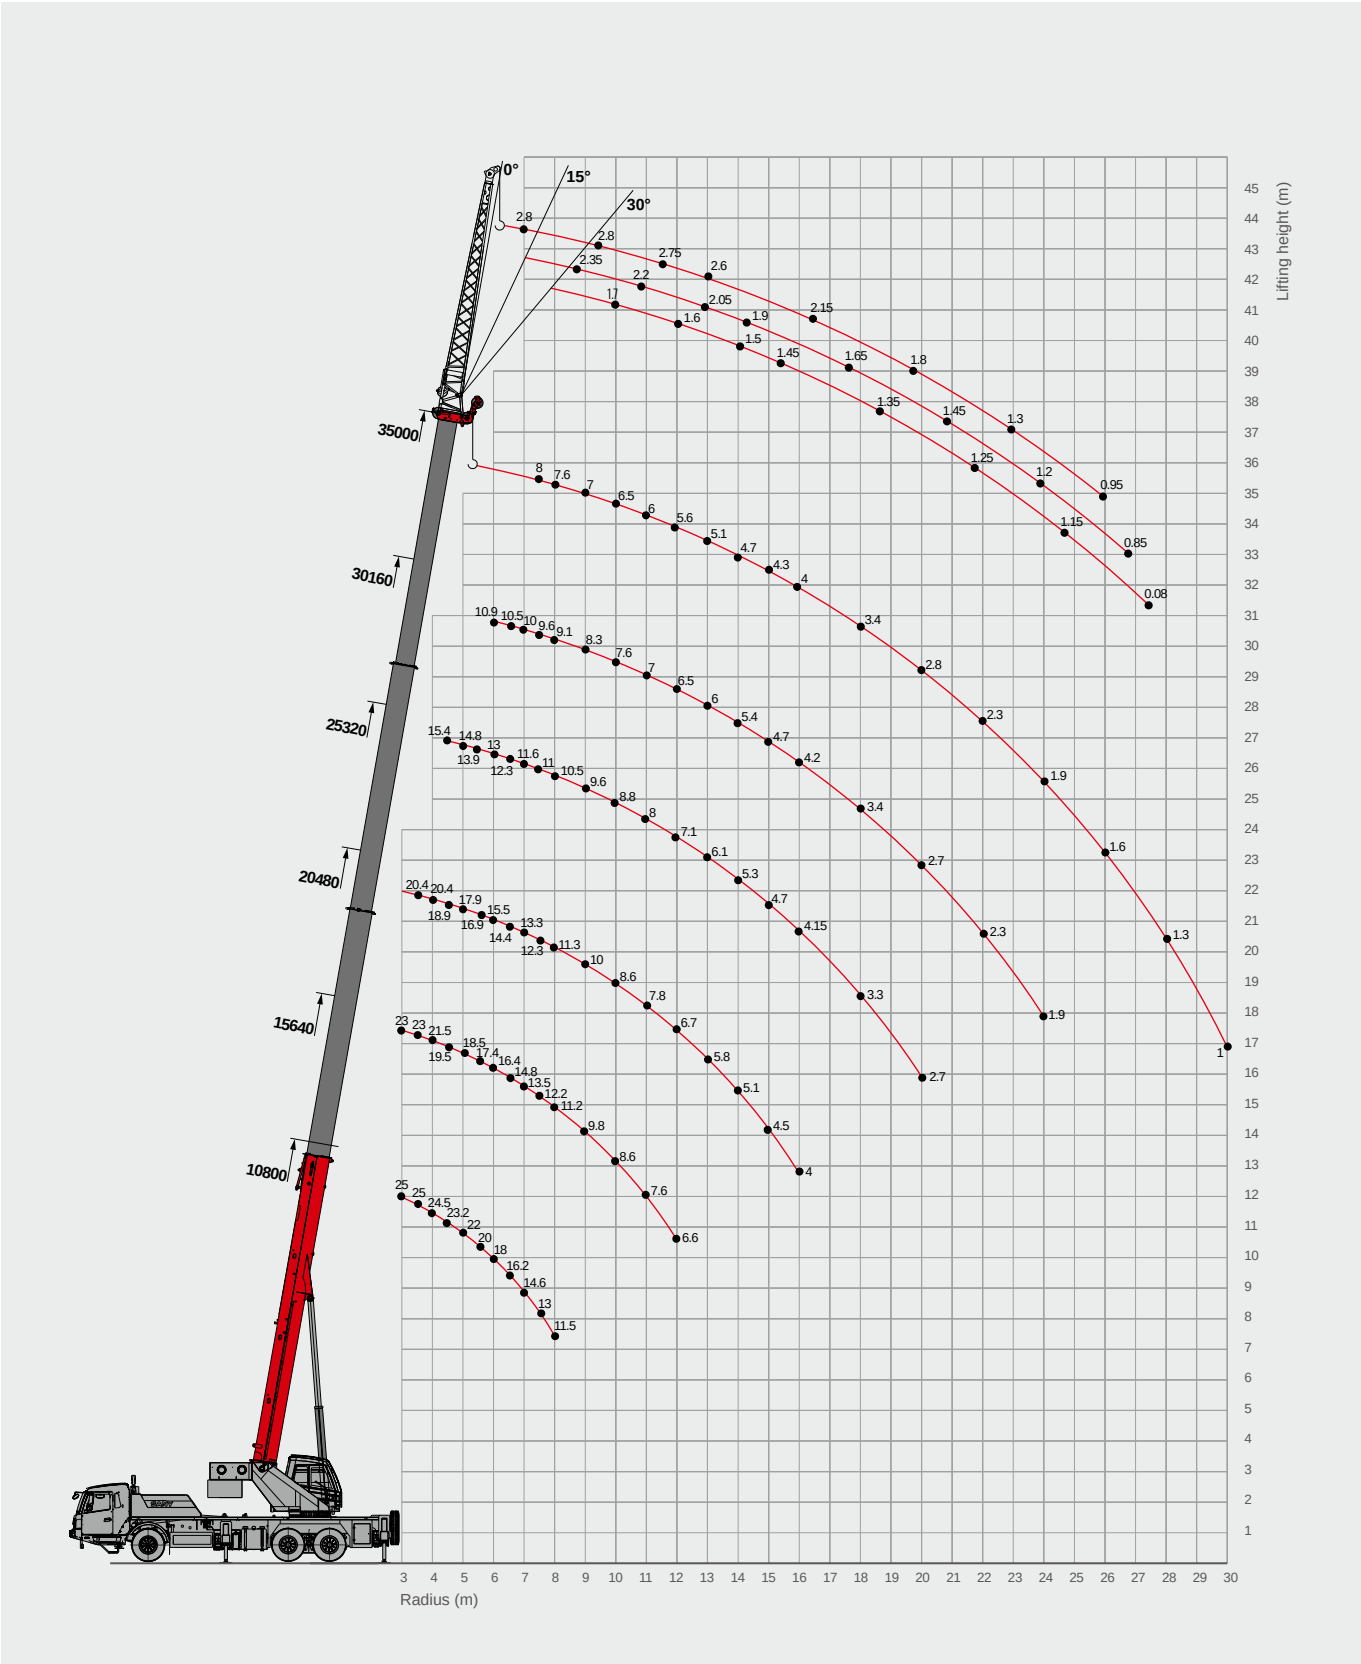



Load Chart-Telescopic Boom

Unit: kg



Radius (m)	10.8	15.6	20.5	25.3	30.2	35	Radius (m)
3.0	25000	23000					3.0
3.5	25000	23000	20400				3.5
4.0	24500	21500	20400				4.0
4.5	23200	19500	18900	15400			4.5
5.0	22000	18500	17900	14800			5.0
5.5	20000	17400	16900	13900			5.5
6.0	18000	16400	15500	13000	10900		6.0
6.5	16200	14800	14400	12300	10500		6.5
7.0	14600	13500	13300	11600	10000		7.0
7.5	13000	12200	12300	11000	9600	8000	7.5
8.0	11500	11200	11300	10500	9100	7600	8.0
9.0		9800	10000	9600	8300	7000	9.0
10.0		8600	8600	8800	7600	6500	10.0
11.0		7600	7800	8000	7000	6000	11.0
12.0		6600	6700	7100	6500	5600	12.0
13.0			5800	6100	6000	5100	13.0
14.0			5100	5300	5400	4700	14.0
15.0			4500	4700	4700	4300	15.0
16.0			4000	4150	4200	4000	16.0
18.0				3300	3400	3400	18.0
20.0				2700	2700	2800	20.0
22.0					2300	2300	22.0
24.0					1900	1900	24.0
26.0						1600	26.0
28.0						1300	28.0
30.0						1000	30.0
Rope rate	8	8	7	5	4	3	Rope rate

Load Chart-Jib

Unit: kg








Boom+Jib				
Boom angle	jib offset angle(°)			Boom angle
	0°	15°	30°	
78°	2800	2350	1700	78°
75°	2800	2200	1600	75°
72°	2750	2050	1500	72°
70°	2600	1900	1450	70°
65°	2150	1650	1350	65°
60°	1800	1450	1250	60°
55°	1300	1200	1150	55°
50°	950	850	800	50°

**Remark:**  
1.Value listed are the max. capacity when the crane is in a level condition on solid ground or surface;  
2.When the fifth outrigger is landed in position, value listed are applicable for 360 degree operation. In case of damage, avoid loading above carrier cab. Front operation is forbidden when the fifth outrigger is not working;  
3.Value above are calculated with hooks and lifting slings considered (320kg main hook, 85kg auxiliary hook);  
4.Radius refers to horizontal reach from hook center to slewing platform center;  
5.Load value is given according to the larger radius or boom length value when the actual radius or boom length falls between two numbers above;  
6.Lifting performance of boom point sheave equals that of 41m boom, while max. load shall be 5t;  
7.Boom load capacity shall be 450kg less than value given when jib is mounted.

# Hoisting Machinery

## TRUCK CRANE

 <b>SPC120T</b> Max.lifting capacity:12T Full-extend boom: 31.2m Max.lifting moment: 510kNm	 <b>STC160</b> Max.lifting capacity:16T Full-extend boom: 32m Max.lifting moment: 730kNm	 <b>STC200S</b> Max.lifting capacity:20T Full-extend boom: 35.5m Max.lifting moment: 880kNm	 <b>STC250-5 (CIS)</b> Max.lifting capacity:25T Full-extend boom: 40.5m Max.lifting moment: 1029kNm
 <b>STC250T4</b> Max.lifting capacity:25T Full-extend boom: 35m Max.lifting moment: 1078kNm	 <b>STC250T5</b> Max.lifting capacity:25T Full-extend boom: 41m Max.lifting moment: 1063kNm	 <b>STC300S</b> Max.lifting capacity:30T Full-extend boom: 40.5m Max.lifting moment: 1029kNm	 <b>STC300</b> Max.lifting capacity:30T Full-extend boom: 34.5m Max.lifting moment: 1120kNm
 <b>STC350T</b> Max.lifting capacity:35T Full-extend boom: 42.5m Max.lifting moment: 1158kNm	 <b>STC450C5 (IN)</b> Max.lifting capacity:45T Full-extend boom: 43.5m Max.lifting moment: 1666kNm	 <b>STC500T</b> Max.lifting capacity:50T Full-extend boom: 44.5m Max.lifting moment: 2100kNm	 <b>STC600T</b> Max.lifting capacity:60T Full-extend boom: 45.5m Max.lifting moment: 2100kNm
 <b>STC700T</b> Max.lifting capacity:70T Full-extend boom: 48m Max.lifting moment: 2107kNm	 <b>STC800S</b> Max.lifting capacity:80T Full-extend boom: 48m Max.lifting moment: 2958kNm	 <b>STC900T</b> Max.lifting capacity:90T Full-extend boom: 50m Max.lifting moment: 3293kNm	 <b>STC1000S</b> Max.lifting capacity:100T Full-extend boom: 59m Max.lifting moment: 3234kNm
 <b>SPC250T3</b> Max.lifting capacity:25T Full-extend boom: 25.4m Max.lifting moment: 920kNm	 <b>SPC250T4</b> Max.lifting capacity:25T Full-extend boom: 33m Max.lifting moment: 920kNm	 <b>SPC320</b> Max.lifting capacity:32T Full-extend boom: 32m Max.lifting moment: 1020kNm	
 <b>SPC400E</b> Max.lifting capacity:40T Full-extend boom: 35m Max.lifting moment: 1372kNm	 <b>SPC400</b> Max.lifting capacity:40T Full-extend boom: 32m Max.lifting moment: 1400kNm	 <b>PSLM-25 (RU)</b> Max.lifting capacity:25T Full-extend boom: 32m Max.lifting moment: 881kNm	

































## ROUGH- TERRAIN CRANE

 <b>SRC300(C)/(CR)</b> Max.lifting capacity:30T Full-extend boom: 31.5m Max.lifting moment: 976 / 908kNm	 <b>SRC400C</b> Max.lifting capacity:40T Full-extend boom: 31.5m Max.lifting moment: 1173kNm	 <b>SRC600C</b> Max.lifting capacity:60T Full-extend boom: 43.5m Max.lifting moment: 2115kNm
---	---	---






















## ALL- TERRAIN CRANE

 <b>SAC1800</b> Max.lifting capacity:180T Full-extend boom: 62m Max.lifting moment: 6320kNm	 <b>SAC2200</b> Max.lifting capacity:220T Full-extend boom: 62m Max.lifting moment: 6800kNm	 <b>SAC2200S</b> Max.lifting capacity:220T Full-extend boom: 62m Max.lifting moment: 6800kNm	 <b>SAC2500S</b> Max.lifting capacity:250T Full-extend boom: 73m Max.lifting moment: 7271kNm
 <b>SAC3000S</b> Max.lifting capacity:300T Full-extend boom: 81m Max.lifting moment: 9900kNm	 <b>SAC3500S</b> Max.lifting capacity:350T Full-extend boom: 73m Max.lifting moment: 11520kNm	 <b>SAC4500S</b> Max.lifting capacity:450T Full-extend boom: 84m Max.lifting moment: 14570kNm	 <b>SAC6000</b> Max.lifting capacity:600T Full-extend boom: 90m Max.lifting moment: 18228kNm

# Hoisting Machinery

 <b>SCC450A</b> Max.lifting capacity:45T Max.Length of Boom: 42m Max.Length of Fixed jib: 15.25m Max.lifting moment: 1503 m	 <b>SCC550A</b> Max.lifting capacity:55T Max.Length of Boom: 52m Max.Length of Fixed jib: 15.25m Max.lifting moment: 2033m	 <b>SCC600A</b> Max.lifting capacity:60T Max.Length of Boom: 52m Max.Length of Fixed jib: 15.25m Max.lifting moment: 222 m	 <b>SCC750A</b> Max.lifting capacity:75T Max.Length of Boom: 52m Max.Length of Fixed jib: 15m Max.lifting moment: 288 m	 <b>SCC4000A</b> Max.lifting capacity:400T Max.Length of Boom: 12m Max.Length of Fixed jib: 12m Max.lifting moment: 5500m	 <b>SCC5000A</b> Max.lifting capacity:500T Max.Length of Boom: 12m Max.Length of Fixed jib: 12m Max.lifting moment: 6900 m	 <b>SCC6500A</b> Max.lifting capacity:650T Max.Length of Boom: 12m Max.Length of Fixed jib: 12m Max.lifting moment: 8600 m	 <b>SCC8000A</b> Max.lifting capacity:800T Max.Length of Boom: 12m Max.Length of Fixed jib: 12m Max.lifting moment: 10058 m	 <b>SCC250TB</b> Max.lifting capacity:25T Max.Length of Boom: 42.5m Max.Length of Fixed jib: 15m Max.lifting moment: 1173m
 <b>SCC800A</b> Max.lifting capacity:80T Max.Length of Boom: 52m Max.Length of Fixed jib: 18m Max.lifting moment: 303 m	 <b>SCC850A</b> Max.lifting capacity:85T Max.Length of Boom: 52m Max.Length of Fixed jib: 18m Max.lifting moment: 303 m	 <b>SCC900A</b> Max.lifting capacity:90T Max.Length of Boom: 52m Max.Length of Fixed jib: 18m Max.lifting moment: 303 m	 <b>SCC1000A</b> Max.lifting capacity:100T Max.Length of Boom: 52m Max.Length of Fixed jib: 18m Max.lifting moment: 303 m	 <b>SCC350TB</b> Max.lifting capacity:35T Max.Length of Boom: 31.5m Max.Length of Fixed jib: 13.7m Max.lifting moment: 173m	 <b>SCC400TB</b> Max.lifting capacity:40T Max.Length of Boom: 31m Max.Length of Fixed jib: 13m Max.lifting moment: 150 m	 <b>SCC550TB-1</b> Max.lifting capacity:55T Max.Length of Boom: 42m Max.Length of Fixed jib: 13m Max.lifting moment: 2180 m	 <b>SCC800TB</b> Max.lifting capacity:80T Max.Length of Boom: 42m Max.Length of Fixed jib: 17.5m Max.lifting moment: 303 m	 <b>SCC800HD</b> Max.lifting capacity:80T Max.Length of Boom: 55m Max.Length of Fixed jib: 17.5m Max.lifting moment: 303 m
 <b>SCC1350A</b> Max.lifting capacity:130T Max.Length of Boom: 70m Max.Length of Fixed jib: 31m Max.lifting moment: 668 m	 <b>SCC1350A-1</b> Max.lifting capacity:130T Max.Length of Boom: 70m Max.Length of Fixed jib: 31m Max.lifting moment: 668 m	 <b>SCI1500A</b> Max.lifting capacity:150T Max.Length of Boom: 70m Max.Length of Fixed jib: 31m Max.lifting moment: 703 m	 <b>SCC1500A-1</b> Max.lifting capacity:150T Max.Length of Boom: 70m Max.Length of Fixed jib: 31m Max.lifting moment: 603 m	 <b>SCC1500D</b> Max.lifting capacity:150T Max.Length of Boom: 70m Max.Length of Fixed jib: 31m Max.lifting moment: 603 m	 <b>SCE600A</b> Max.lifting capacity:60T Max.Length of Boom: 31.5m Max.Length of Fixed jib: 15.25m Max.lifting moment: 228 m	 <b>SCA1000A/ SCE1000A</b> Max.lifting capacity:100T Max.Length of Boom: 52m Max.Length of Fixed jib: 22.5m Max.lifting moment: 303 m	 <b>SCE1350A</b> Max.lifting capacity:130T Max.Length of Boom: 70m Max.Length of Fixed jib: 31m Max.lifting moment: 668 m	 <b>SCA2600A</b> Max.lifting capacity:260T Max.Length of Boom: 80m Max.Length of Fixed jib: 42m Max.Length of Luffing jib: 42m Max.lifting moment: 1470 kNm
 <b>SCC1800</b> Max.lifting capacity:180T Max.Length of Boom: 65m Max.Length of Fixed jib: 31m Max.lifting moment: 1090m	 <b>SCC2000A</b> Max.lifting capacity:200T Max.Length of Boom: 65m Max.Length of Fixed jib: 31m Max.lifting moment: 1152 m	 <b>SCC2600A</b> Max.lifting capacity:260T Max.Length of Boom: 80m Max.Length of Fixed jib: 42m Max.Length of Luffing jib: 42m Max.lifting moment: 1470 kNm	 <b>SCC2800A</b> Max.lifting capacity:280T Max.Length of Boom: 80m Max.Length of Fixed jib: 42m Max.Length of Luffing jib: 42m Max.lifting moment: 1638 m	 <b>SCC3500A</b> Max.lifting capacity:350T Max.Length of Boom: 80m Max.Length of Fixed jib: 42m Max.Length of Luffing jib: 42m Max.lifting moment: 4058m				

## TOWER CRANE

 <b>SYT63(T5013-5)</b> Height: 40.5m Boom Length: 50m Tip load: 1.3T Max load: 5T	 <b>SYT80(T5710-6)</b> Height: 40.5m Boom Length: 57m Tip load: 1T Max load: 6T	 <b>SYT80(T6012-6)</b> Height: 40.5m Boom Length: 60m Tip load: 1.2T Max load: 6T	 <b>SYT80(T6510-6)</b> Height: 43m Boom Length: 65m Tip load: 1T Max load: 6T	 <b>SYT80(T6510-8)</b> Height: 43m Boom Length: 65m Tip load: 1T Max load: 8T
 <b>SYT80(T6013-6)</b> Height: 44.8m Boom Length: 60m Tip load: 1.3T Max load: 6T	 <b>SYT100(T6510-8)</b> Height: 44.8m Boom Length: 65m Tip load: 1T Max load: 8T	 <b>SYT100(T6515-6)</b> Height: 48m Boom Length: 65m Tip load: 1.5T Max load: 6T	 <b>SYT125(T6510-8)</b> Height: 44.8m Boom Length: 65m Tip load: 1T Max load: 8T	 <b>SYT125(T6515-8)</b> Height: 45m Boom Length: 65m Tip load: 1.5T Max load: 8T
 <b>SYT125E2(T6515-8)</b> Height: 60m Boom Length: 65m Tip load: 1.5T Max load: 8T	 <b>SYT160(T7015-10)</b> Height: 60m Boom Length: 70m Tip load: 1.5T Max load: 10T	 <b>SYT250(T7525-16)</b> Height: 51m Boom Length: 75m Tip load: 2.5T Max load: 16T	 <b>SYT250(T7527-12)</b> Height: 51m Boom Length: 75m Tip load: 2.7T Max load: 12T	 <b>SYT315(T7530-16)</b> Height: 60m Boom Length: 75m Tip load: 3T Max load: 16T
 <b>SFT100(T6013-8)</b> Height: 45m Boom Length: 60m Tip load: 1.3T Max load: 8T	 <b>SFT160(T7015-10)</b> Height: 60m Boom Length: 70m Tip load: 1.5T Max load: 10T	 <b>SFT258(T7021-12)</b> Height: 60m Boom Length: 70m Tip load: 2.1T Max load: 12T	 <b>SFT321(T7526-16)</b> Height: 60m Boom Length: 75m Tip load: 2.6T Max load: 16T	
		 <b>SLT160(T5523-12)</b> Height: 45m Boom Length: 55m Tip load: 2.3T Max load: 12T	 <b>SLT260(T5531-18)</b> Height: 52m Boom Length: 55m Tip load: 3.1T Max load: 18T	





## **Sany Automobile Hoisting Machinery Co., Ltd.**

No.168, Jinzhou Avenue, Jinzhou Development Zone, Changsha, Hunan, China

Postcode: 410600

Service: 0086-400 6098 318      Consulting: 400 8879 318

Email: [crd@sany.com.cn](mailto:crd@sany.com.cn)

### Reminder:

For safe and reliable operation of the diesel engines, please fill Grade IV machines with Grade IV diesel and urea solution conforming to related national standards. Please refer to the operating instructions and related standards for details.

Any change in the technical parameters and configuration due to advancement in technology may occur without prior notice. The machine in the figures may include auxiliary equipment. This brochure is for reference only, and goods in kind shall prevail. Copyright at Sany Heavy Industry. No part of this catalogue may be copied, recorded or used for any purpose without written approval from Sany Heavy Industry.

© Printed in February 2020 in China

